
ULTIMATE ERGO MASS SPEC BENCH

WITH SINGLE PUMP ENCLOSURE

OMNI LAB SOLUTIONS

OL-MS-ERGO-ULT-S

Overall Bench Dimensions: 96W x 33D x 37H

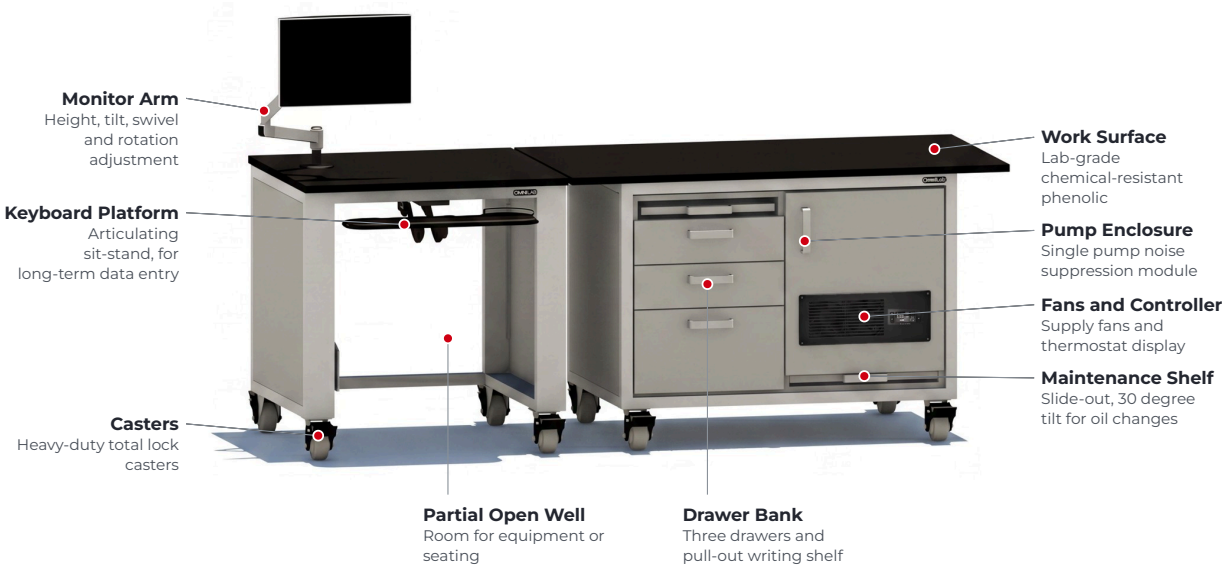

Two-Piece Enclosed Ergo MS Bench (60W MS Bench and 36W open-well section for seating) with lab-grade chemical-resistant phenolic work surfaces and steel frames with lower shelves on heavy-duty total lock casters. Includes a noise suppression module for a single vacuum pump with acoustic foam paneling, push-pull cooling (220 CFM combined rated exhaust), a vented door, three rear hose grommets, a slide-out maintenance shelf with 30 degree tilt for oil drainage, and an oil drip pan with shock absorbers; and a drawer bank with three full-extension drawers and a pull-out writing shelf. Also includes a PC accessory kit with a monitor arm, an articulating sit-stand keyboard platform, and a vertical CPU/UPS holder, plus two 120V 8-outlet surge suppressors with 12-foot cords. Overall bench size: 96W x 33D x 37H (Pump Enclosure Interior: 18-1/2W x 25-3/4D x 22-1/4H).

SPECIFICATIONS

OVERALL SIZE 96W x 33D x 37H	WORK SURFACE 1" lab-grade chemical-resistant phenolic	FRAME Fully welded steel, epoxy powder coat finish, with wipe-clean laminate shelves
PUMP ENCLOSURE Acoustic foam lined, 220 CFM push-pull cooling, thermostat controller	CASTERS Heavy-duty total lock	STORAGE AND PANELS Wipe-clean laminate in a color that coordinates with the frame

© 2026 OMNI Lab Solutions · Built to order in San Diego, California

omnilabsolutions.com · (619) 579-6664 · info@omnilabsolutions.com

ULTIMATE ERGO MASS SPEC BENCH


WITH SINGLE PUMP ENCLOSURE


OMNI LAB SOLUTIONS

COMPONENTS INCLUDED

QTY	MODEL #	DESCRIPTION
1	**OL3IT60E**	Enclosed Instrument Bench 60W x 33D x 37H with Lab-Grade Chemical Resistant Phenolic Work Surface and Inset Steel Frame (48W x 31D x 30-1/4H) with Lower Shelf on Heavy Duty Total Lock Casters, 1,200 lb Uniform Load Capacity
1	**OL3IT36E-FSF-W**	Enclosed Instrument Bench 36W x 33D x 37H with Lab-Grade Chemical Resistant Phenolic Work Surface and Flush Steel Frame (35-3/4W x 31D x 30-1/4H) with Partial Open Well for Equipment or Seating and Lower Shelf on Heavy Duty Total Lock Casters, 1,200 lb Uniform Load Capacity
1	**OL3NS-S-R**	Bench-Mounted Noise Suppression Module for Single Vacuum Pump 22W x 28-1/2D x 27H with SONEX® Acoustic Foam Paneling on Interior, High-Airflow Push-Pull Cooling System with Dual Front Supply Fans and Dual Rear Exhaust Fans (220 CFM Combined Rated Exhaust), Three (3) Flexible Hose Grommets in Rear, Includes Digital Display, Programmable Thermostat Controller with Automatic Fan Speed Control and Alarm Warnings, Door Hinged Right
1	**OL3SOS-S**	Slide-Out Pump Maintenance Shelf with 30 Degree Tilt for Above Noise Suppression Module, Allows Gravity-Assisted Oil Drainage for Pump Oil Changes, Single Pump Shelf
1	**OL3ODP-XL**	Oil Drip Pan for Pump with Mounted Shock Absorbers, Large
1	**OL3DB21**	Drawer Bank 20-3/4W x 22D x 27H with Three (3) Full Extension Lab Drawers and One (1) Pull-Out Utility Shelf
1	**OL3MA-C**	Ergotron® Work Surface Mounted Ergonomic Monitor Arm, Clamp Mount, Holds Monitors up to 34 Inch and 22 lb, VESA 75 x 75 and 100 x 100 Compatible, Height, Tilt, Swivel and Rotation Adjustment, Integrated Cable Management
1	**OL3AKMP**	Sit-Stand Articulating Keyboard/Mouse Platform, Stable for Extended Computer Work, 12-1/2 Inch Total Height Adjustment (7 Inch Up, 5-1/2 Inch Down), Dial-In Tilt Adjustment, Fully Retractable Slide Rail Mount
1	**OL3CPU**	Ergotron® Side-Mounted Vertical CPU/UPS Holder, Adjustable to Fit Units 2 to 8 Inch Wide, 40 lb (18 kg) Capacity, Open Design for Access to Ports and Power Buttons, Steel and Aluminum Construction
2	**OL3E**	Tripp Lite® Isobar® Surge Suppressor, Eight (8) 120V NEMA 5-15R Outlets in Isolated Filter Banks for EMI/RFI Noise Protection, 3,840 Joule Rating, 12 Amp Resettable Circuit Breaker (1,440 Watt Capacity), UL Listed, Diagnostic LEDs, All-Metal Housing, 12 Ft Cord, Bench Mounted

PUMP ENCLOSURE INTERIOR: CLEAR DIMENSIONS

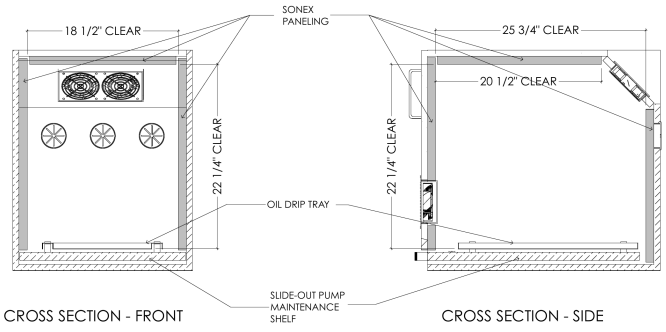

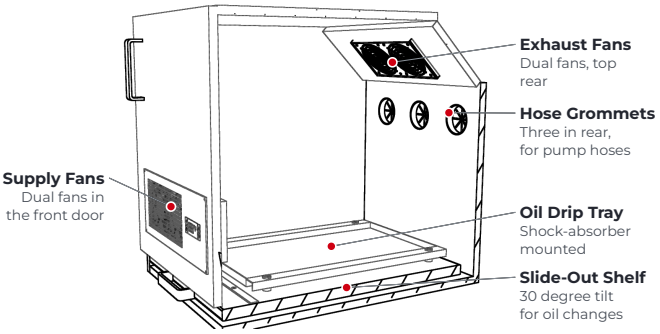

Interior clear dimensions: 18-1/2W x 25-3/4D x 22-1/4H (20-1/2D at the top, where the exhaust fans sit at an angle). Confirm pump, hoses, cords and service clearance fit before ordering.

FINISH OPTIONS



Main image shown in **Gray** (standard). **Also available in White** (shown here). Additional frame colors may be available upon request.

© 2026 OMNI Lab Solutions · Built to order in San Diego, California

omnilabsolutions.com · (619) 579-6664 · info@omnilabsolutions.com